


FOUR WAY

HAND PALLET TRUCK

DESIGNED FOR EFFICIENCY. MADE FOR WORKING.

The Low Profile Four Way (MW) and Ultra Low Profile Four Way (UW) helps you be more efficient. It easily moves 4-way entry pallets in all four directions, which maximizes your warehouse space and trailer load density.

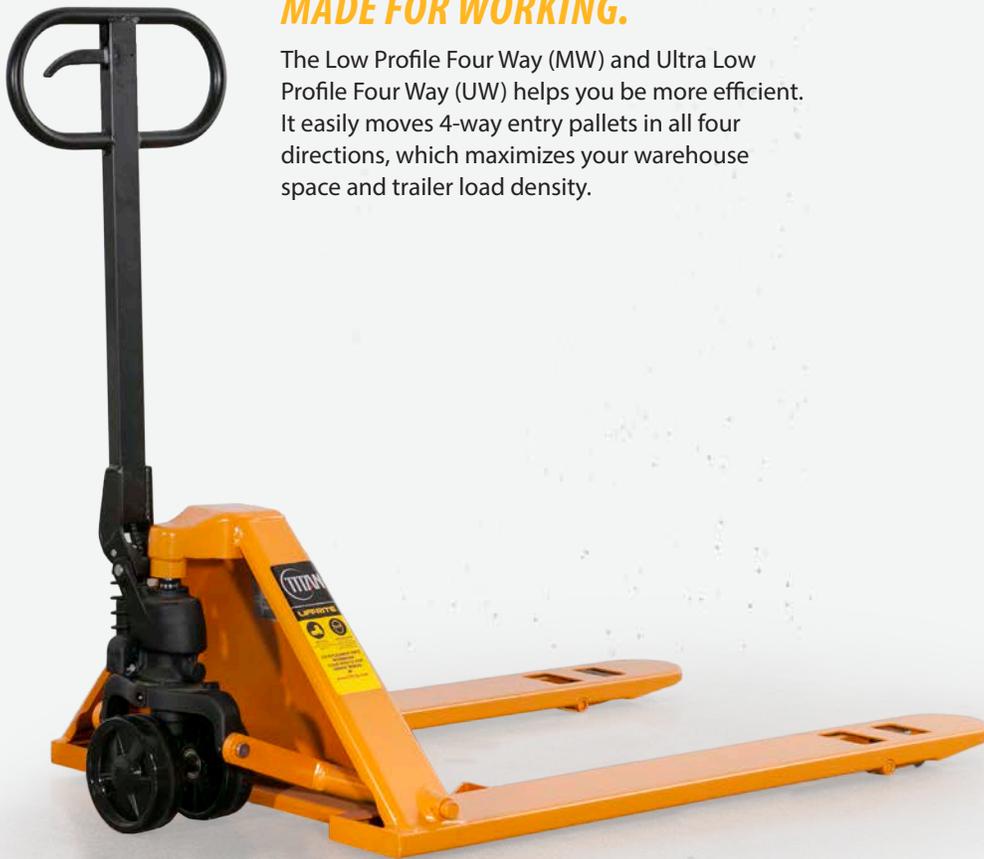

LIFFRITE
KEEPS YOU MOVING


FOUR WAY

HAND PALLET TRUCK

FOR ORDERS OR INQUIRIES CALL 1.800.558.6012 OR EMAIL HPTORDERS@LIFTRITE.COM

FEATURES

- » The low profile forks are perfect for moving pallets or skids with low clearance openings.
- » Comes with a durable and rugged leak-proof cast hydraulic pump.
- » The powder coated finish lets it withstand harsh environments.
- » Engineered for 4-way pallets.

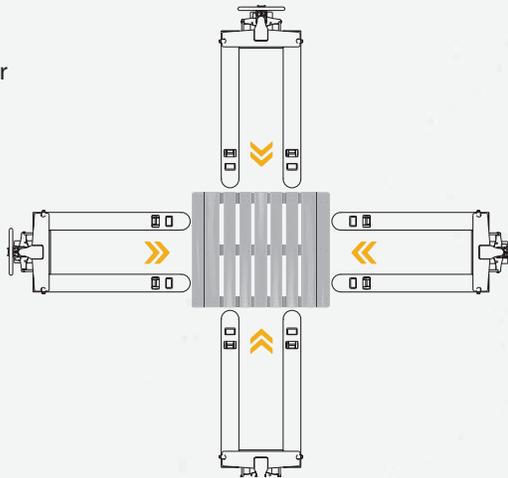

The unit is equipped with rugged black nylon wheels and steel load rollers



Fingertip controls provide convenient access to lift, lower and keep the truck in neutral



Get more done with less. The simplified pumps has fewer parts

Durable powder coat paint finish

Due to continuous product improvement, specifications are subject to change without notice or obligation. Some systems and features shown are optional at extra cost. Lift-Rite is a U.S. trademark of Lift-Rite.

STANDARD SPECIFICATIONS:

- » Capacity: 5,000 lbs
- » Wheel Diameter: 7.00 inches
- » Wheel Type: Nylon
- » Roller Type: Steel
- » Weight: 205 lbs



OPTIONS:

UWK1LY00-000

- » Low Height: 1.75 inches
- » Fork Length: 48 inches
- » Frame Width: 33.00 inches
- » Fork Width: 6.00 inches
- » Raised Height: 6.75 inches
- » Roller Diameter: 1.75 inches
- » Weight 205 lbs

MWK1LY00-000

- » Low Height: 2.00 inches
- » Fork Length: 48 inches
- » Frame Width: 33.00 inches
- » Fork Width: 6.00 inches
- » Raised Height: 6.75 inches
- » Roller Diameter: 2.0 inches
- » Weight 205 lbs

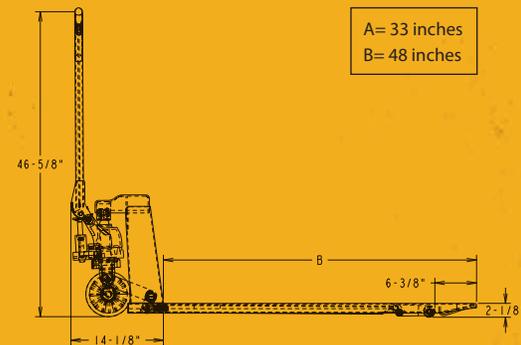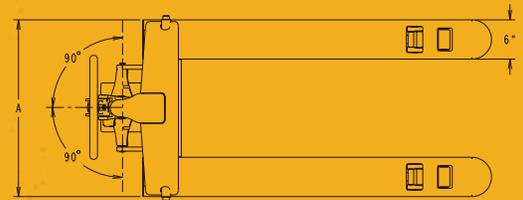

LIFT-RITE
KEEPS YOU MOVING

©2016 Lift-Rite
PO Box 130, Greene, NY 13778-0130
www.liftrite.com | Toll free 1-800-558-6012